



S2555 Series

Panama

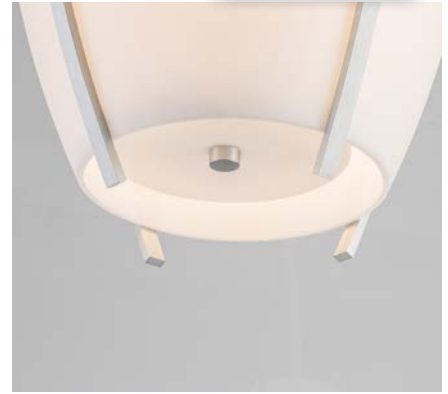

DIMENSIONS



W	H	X	BASE MODEL NO.
13"	42"	24 1/2"	S2555-L48M
17"	48"	30 3/4"	S2556-L64M

SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided

FEATURES

- Opal Matte Acrylic
- Solid Bar Stock Material
- LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish + OA + Option Code

S2555-L48M	+	27K	+	PT	+	OA	+	Option
S2556-L64M		30K		PB				
		35K		BB				
		40K		GT				
				NT				
				CT				
				ZT				
				TT				
				PWT				
				BST				

FINISHES

PB Polished Brass	TT Toffee Touch
BB Brushed Brass	ZT Bronze Touch
GT Gold Touch	PWT Pewter Touch
NT Nickel Touch	BST Blackened Steel Touch
CT Copper Touch	PT Powder Coated Finishes*

*(Specify Color Code from the list of Powder Coating Finishes)

OPTIONS

BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant.

EML Remote 10W Emergency LED Battery Backup

OA Specify Overall Height of Fixture in Inches; E.G. - OA48

FAA Faux Alabaster Acrylic (Hand Painted) (FA1 White; FA2 Antique; FA3 Grey; FA4 Taupe; FA5 Honey; FA6 Tuscan)

SWC 35-Degree Swivel Canopy

LIGHT OUTPUT

LXX = ~ 75 LPW Delivered Lumens (Example: L48M= 48W x 75LPW = 3,600 Lumens)

