



# S7790 Series

Mini-Minimo Surface

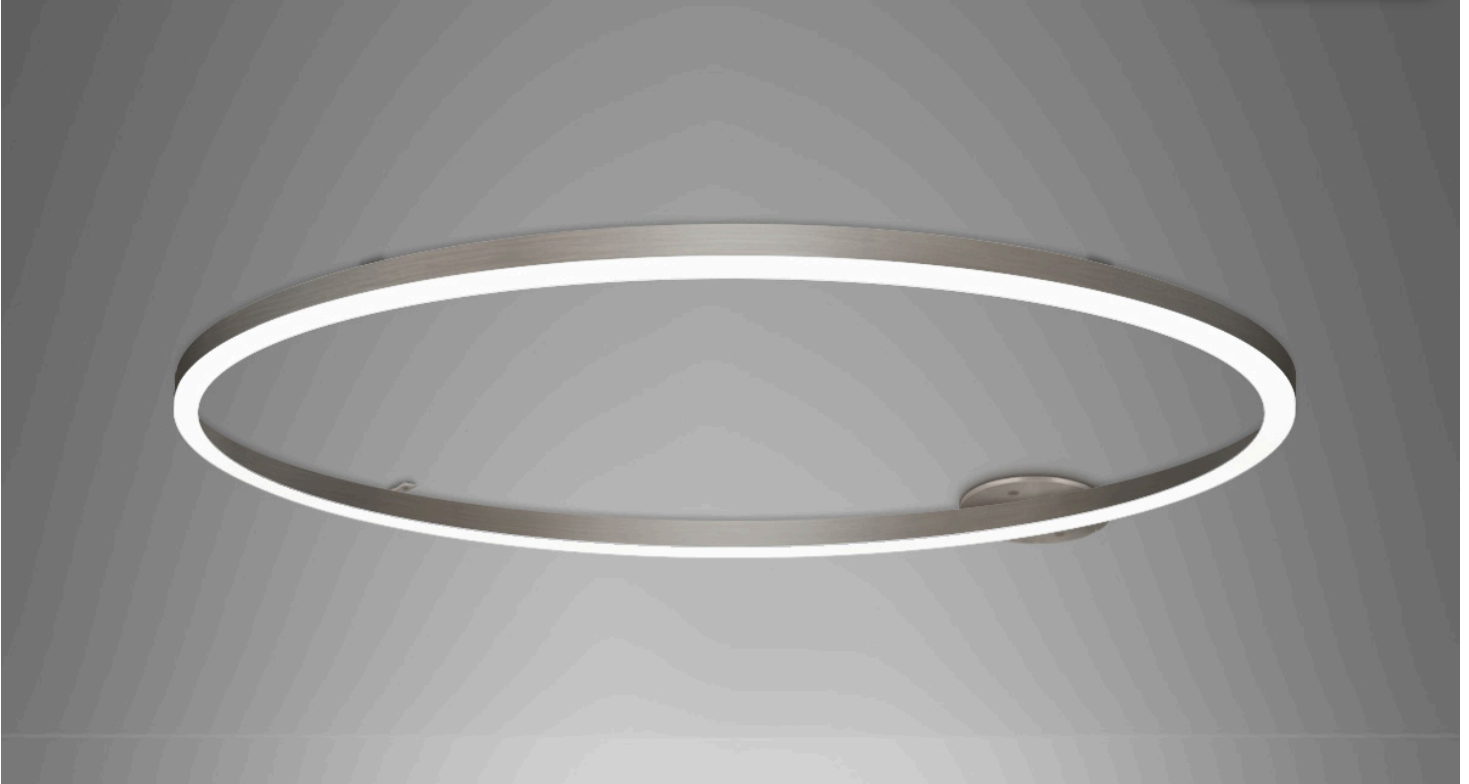

## DIMENSIONS

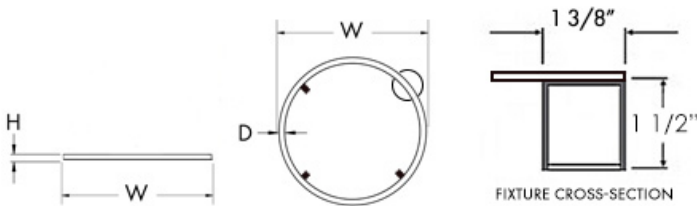

W	H	D	BASE MODEL NO.
32"	1 1/2"	1 3/8"	<b>S7790-L46</b>
36"	1 1/2"	1 3/8"	<b>S7791-L62</b>
48"	1 1/2"	1 3/8"	<b>S7792-L78</b>
60"	1 1/2"	1 3/8"	<b>S7793-L90</b>
72"	1 1/2"	1 3/8"	<b>S7794-L132</b>
96"	1 1/2"	1 3/8"	<b>S7795-L192</b>
120"	1 1/2"	1 3/8"	<b>S7796-L240</b>

## SPECIFICATIONS

**Driver:** 0-10V dimming to 1%, 120/277 (Constant Voltage)

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Mounting consists of (1) full size canopy and 3 mounting clips at 90 degrees.

## FEATURES

- Opal Matte Flexible Silicone Bottom Lens
- Solid Aluminum Material
- Remote Driver(s) in a driver enclosure is included
- LED 0-10V Dimming Driver

## ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + CCT + Finish + Option Code

S7790-L46	+	27K	+	PT	+	Option
S7791-L62		30K		XT		
S7792-L78		35K		CC		
S7793-L90		40K				
S7794-L132						

## FINISHES

PT Powder Coated Finishes\*

XT Trending Brushed Metal Finishes\*

CC Custom Painted Finish

\*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

## OPTIONS

EML Remote 10W Emergency LED Battery Backup (Requires Additional Power Cable)

## LIGHT OUTPUT

LXX = ~ 49.4 LPW Delivered Lumens (Example: L46= 46W x 49.4LPW = 2,272 Lumens)