

S9315 Series



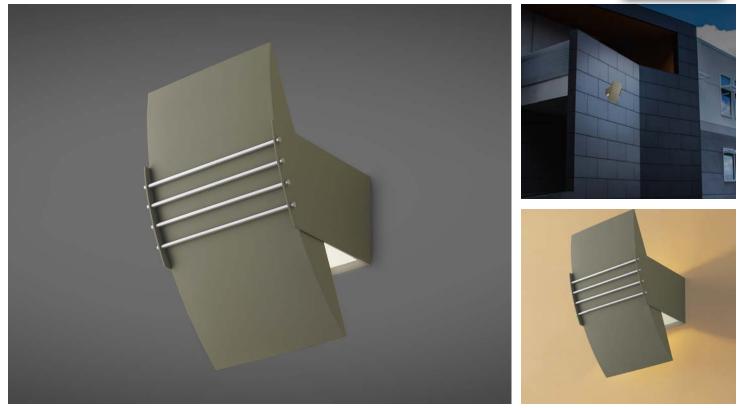

DIMENSIONS



SPECIFICATIONS

Driver: 0-10V dimming to 1%, 120/277 Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others).

FEATURES

- Solid Aluminum Material
- UL Listed for Wet Location
 LED 0-10V Dimming Driver

ORDER AS A COMPLETE UNIT: Model No. + Lamp Code + CCT + Housing Finish + Accent Bar Finish + Option Code								
S9315-L24	+	27K 30K 35K 40K	+	PT BA	+	PT BA	+	Option
HOUSING FINISHES								
BA Brushed Aluminum PT Powder Coated Finishes*								
*(Specify Color Code from the list of Powder Coating Finishes [except interior only metallics])								
ACCENT BARS FINISHES								
BA Brushed Aluminum PT Powder Coated Finishes*								
*(Specify Color Code from the list of Powder Coating Finishes [except interior only metallics])								
OPTIONS								
BAC Buy America; Buy American Act; and Build America, Buy America Act Compliant. EML Remote 10W Emergency LED Battery Backup								
LIGHT OUTPUT								
LXX = ~ 48 LPW Delivered Lumens (Example: L24= 24W x 48LPW = 1152 Lumens)								

** Try our new **Shimmer Metalic Paints**, Formulated for Exterior Conditions.

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182 © Copyright 2024 Scott Architectural Lighting. All Rights Reserved. Made in the USA.

