



Standard Finish: Powdercoated Bronze



PART NUMBER

SR-EX104- _____ - _____ - _____ - _____



Model No.

SR-EX104



LED or
Lamp Base

L LED



Watts

24
32
40



CCT
(If Applicable).

30K
35K
40K




Finish

PT Powder Coated*
BB Brushed Brass
BN Brushed Nickel
AB Antique Brass

*(Specify Color Code from the list of Powder Coating Finishes)

**(Consult Factory for more options)



DIMENSIONS

BASE MODEL NO.	H	W	D	MC
SR-EX104	7"	13"	6 7/8"	3 1/2"

SPECIFICATIONS

Dimming: 0-10V Dimming, 120/277V (Consult factory for 347V)

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (By Others).


FEATURES

- 3000/3500/4000K on-board optional CCT
- 24/32/40W on-board optional outputs
- IP65 Rating
- Type 3 Distribution Pattern
- Tempered Glass Lens
- Downlight Suitable for Wet Location
- Uplight Suitable for Damp Location
- UL Listed for Wet Location
- Full Cut-off Distribution
- ELV Dimming

APPLICATIONS

- Building Exterior
- Entry Way


SPECIAL FEATURES (these features come on all models)

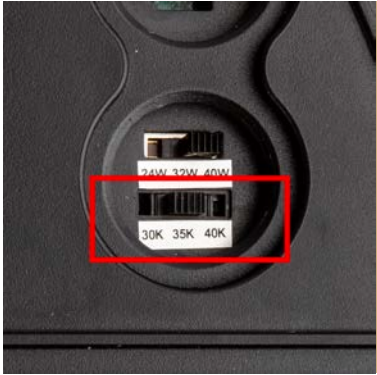

3 Color Temperatures

On board switch allows for on-site adjustment to 3000/3500K/4000K options.

Note: For factory Pre-set, please indicate the CCT in the part number (ex: SR-EX104-L24-35K-BL)

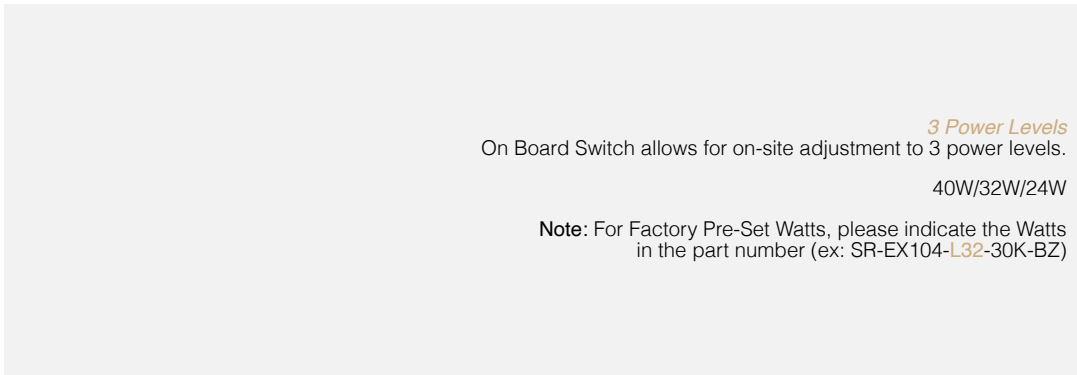


3 Power Levels

On Board Switch allows for on-site adjustment to 3 power levels.

40W/32W/24W

Note: For Factory Pre-Set Watts, please indicate the Watts in the part number (ex: SR-EX104-L32-30K-BZ)

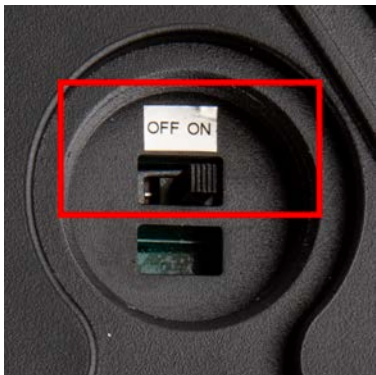

Photosensor

On Board Sensor and Switch allows an internal photocell to be turned on or off as needed.

NOTE: For Factory Pre-Set to ON, please indicate in the part number (ex: SR-EX104-L24-40K-BST-PS)

Don't see an option you are looking for? Contact your agent to request a modification.